


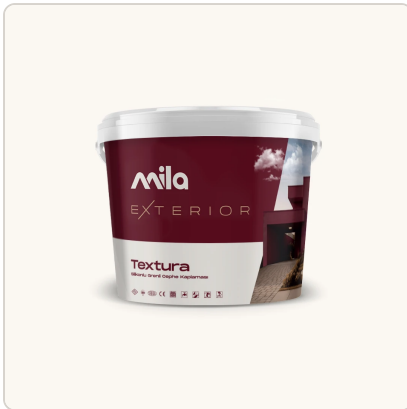

Mila Exterior

Textura

PRODUCT TECHNICAL DATA SHEET

PRODUCT DESCRIPTION

A water-based, silicone, grained exterior paint. Its balanced texture and high durability give facades a strong, characterful and long-lasting surface.

PRODUCT DETAILS

Mila Exterior Textura is a water-based, silicone, grained exterior paint. Its balanced texture and high durability give facades a strong, characterful and long-lasting surface. A grained, textured and durable surface. Applied by Mila's application team with a textured (coral) roller. The surface must be clean, dry and sound. The texture is controlled by roller type and application direction. With the expertise of Mila's application team, it delivers a durable, aesthetically lasting result on every surface. Areas of use: exterior facade walls. On concrete, plaster and suitably primed surfaces, in residential, housing-estate and architectural projects.

FEATURES

- **Grained decorative texture:** Its balanced grain texture gives facades a strong, characterful and durable surface.
- **Conceals surface imperfections:** Its textured structure hides minor surface defects for a homogeneous look.
- **Silicone weather resistance:** Its siloxane structure and water-repellent surface offer long-lasting protection against UV and weather.

AREAS OF USE

- Suitable for exterior facade walls; on concrete, plaster and suitably primed surfaces.
- The surface must be dry, clean and sound; free of dust, grease and loose residues, with weak substrates consolidated beforehand.

APPLICATION

Primer: A suitable primer is applied; it balances absorbency and improves adhesion.

Application method: Applied with a textured (coral) roller.

Texture: The texture is controlled by roller type and application direction to achieve a balanced grain.

Application conditions: Work between +5°C and +35°C; protect the surface from direct sun, rain and strong wind.


SURFACE / TEXTURE

A grained, textured and durable surface.

Mila Exterior — Textura

Technical Reference

APPLICATION SYSTEM



TECHNICAL DATA

Appearance / form	Paste / textured coating
Colour	Various colours
Finish / gloss	Textured matt
pH	8 – 9
Density	1.70 – 1.90 g/cm³
Solid content	~75 – 85 %
Viscosity	High (textured)
Flash point	Not applicable (water-based)
Flammability	Non-flammable

COVERAGE

0.8–1.6 m²/kg

Coverage varies by surface smoothness/absorbency, primer performance, application thickness and the targeted surface character.

DRYING TIME

- Surface Drying: 1–3 hours (depending on ambient conditions)
- Full Cure: 24–72 hours (depending on product type and application thickness)

PACKAGING

5 kg, 12.5 kg, 25 kg

STORAGE

Shelf life is 2 years when stored unopened in its original packaging, in a cool, dry place away from direct sunlight (+5°C to +35°C).

CLIMATE & REGIONAL GUIDANCE

- Cool / humid or coastal air (high RH): cure and recoat times lengthen — extend intervals, confirm the substrate is dry (< 5 %) and ventilate; do not apply near the dew point.
- Hot / dry inland air: the surface skins quickly — work in shade, avoid midday sun, keep a wet edge and do not over-thin.
- Temperature: apply between +5 °C and +35 °C; cooler slows cure, warmer accelerates it.
- On facades subject to movement or thermal cycling, specify the elastomeric option (Flexa) to preserve flexibility.

APPLICATION CONDITIONS

- Ambient & substrate temperature +5 °C to +35 °C (41–95 °F)
- Relative humidity below 80 %
- Substrate moisture below 5 %
- Do not apply in direct sun, rain, fog or strong wind; protect fresh work for 24–48 h

TOOLS

Coral roller · Stainless steel trowel (first coat, scraping)

SUITABLE SUBSTRATES

- ✓ Exterior & interior facades
- ✓ Concrete and exposed concrete
- ✓ Cement / lime render and plaster
- ✓ Gypsum board and gypsum plaster
- ✓ Brick and masonry

NOT SUITABLE FOR

- ✗ Horizontal, water-pooling surfaces
- ✗ Continuously wet or water-immersed surfaces
- ✗ Untreated or rusting metal (without a suitable primer)
- ✗ Chalking, friable or non-adhering surfaces (without consolidation)
- ✗ Frozen, frosty or surfaces below +5 °C

CLEANING

Clean tools with water immediately after use, while the product is still wet.

MAINTENANCE

Clean the cured surface with a soft cloth and a mild, non-abrasive detergent. Avoid aggressive solvents and abrasive pads. Allow full cure before cleaning or heavy use.

ON-SITE REPAIR & TOUCH-UP

1. Clean the damaged area; remove any loose or flaking material.
2. Feather-sand the edges; fill deeper defects with Multifiller and re-prime if bare substrate is exposed.
3. Re-apply the same product with the original tool/technique, blending outward to a natural break (corner, edge or plane change).
4. Where used, re-apply the protective topcoat over the repaired area.

Decorative finishes may show a slight variation at repair edges; blend to a natural break and keep colour/batch records for accurate matching.

Mila Exterior — Textura

Safety & Regulatory

HAZARD STATEMENTS

The product is not classified as hazardous according to Regulation (EC) No 1272/2008 (CLP) and the Turkish SEA/KKDİK Regulation.

EUH208 Contains 2-octyl-2H-isothiazol-3-one; 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-2H-isothiazol-3-one (3:1). May produce an allergic reaction.

PRECAUTIONARY STATEMENTS

- P273 Avoid release to the environment.
- P102 Keep out of reach of children.
- P501 Dispose of contents/container in accordance with local/national regulations.

Note: For more information, please review the product Safety Data Sheet (SDS).

This technical document is based on data obtained under standard laboratory conditions. For matters not specified herein, approval must be obtained from our technical team; otherwise our company cannot be held responsible for application errors arising from incomplete information. We reserve the right to make changes to the content. For detailed risks and precautions regarding health, safety and transport, the Safety Data Sheet (SDS) must be reviewed.



MİLA PROJE MAĞAZACILIK ANONİM ŞİRKETİ

📍 Mehmet Akif Ersoy Mah. Ünvan Sok. No:11-13A Arnavutköy / İstanbul
☎ 0212 445 4544 ✉ info@milaturkiye.com www.milaturkiye.com



MİLA PRODUCT TECHNICAL DATA SHEET